

# Single turn Potentiometer


## ET3314 Chip Cermet Trimming Potentiometer

EIECSOUND®

Surface Mount / Single-Turn/ Cermet/ Industrial/ Sealed

4 Terminal Styles

Rohs Compliant

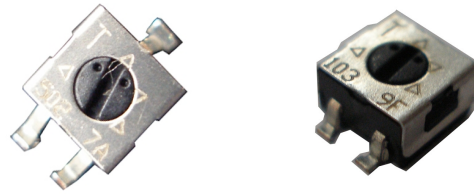

### Electrical Characteristics

Standard Resistance Range: 10Ω - 2MΩ

Resistance Tolerance: ±10% std.

Absolute Minimum Resistance: ≤1% or 2Ω

Contact Resistance Variation: ≤3% or 3Ω

Insulation Resistance : R1 ≥1,000 MegΩ

Withstand Voltage : 500VAC

Effective Travel: 210° normal

### Environmental Characteristics

Power Rating:(200V max)0.25W@70°C,0W@125°C

Temperature Range: -55°C to +125°C

Temperature Coefficient: ±100ppm/°C

Vibration:10-500Hz,0.75mm,6Hour:ΔR≤±1%

Shock: 390m/s, 4000cycles, ΔR≤±3%

Endurance:0.25W@70°C,1000H,ΔR≤±3%

Rotational Life: 200Cycles,ΔR≤±3%

### Physical Characteristics

Starting Torque: ≤10mN·m

Flammability: UL.94V-0

Marking: Resistance code, Model

Standard Packaging: 250 or 500pcs per Reel

### How To Order:

ET3314 J - 1 - 502

Model \_\_\_\_\_  
 Style \_\_\_\_\_  
 Standard or Modified Product Indicator (Styles J, G, R) \_\_\_\_\_  
 -1 = Single Slot  
 Resistance Code \_\_\_\_\_

### Standard Resistance Table:

Resistance (Ohms)	Resistance Code
10	100
20	200
50	500
100	101
200	201
500	501
1000	102
2000	202
5000	502
10000	103
20000	203
25000	253
50000	503
100000	104
200000	204
250000	254
500000	504
1000000	105
2000000	205

Special Resistance Available

### ET3362 Common Dimension & Adjust Method

